
## Wall-mounted cabinet speaker - BBR-WAL 165/6 PP

Voice alarm system Product datasheet

## Wall-mounted cabinet speaker

Attractive wall-mounted cabinet speaker for voice alarm. Equipped with ceramic terminal block, thermal fuse and a temperature resistant cable, providing increased security in case of a fire.

BBR-WAL 165/6 PP is approved according to EN 54-24:2008. Characteristic for the BBR-WAL 165/6 PP is the premium MDF-wood housing whose robustness is featured by the IP54 degree of protection. The integrated 165 mm full range chassis guarantees an excellent frequency response and is suitable for the acoustic irradiation in almost every room.

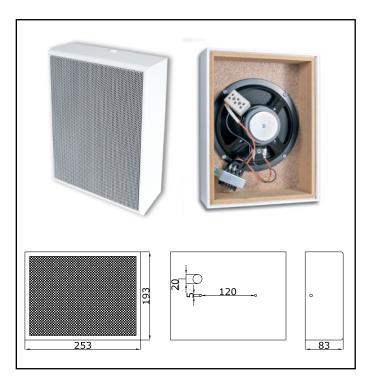

Technical specifications	
Certification	EN 54-24:2008
Loading rate	6 Watt
Chassis type	165 mm full range
Frequency range (-10 dB)	140 - 19 700 Hz
SPL 1 W / 1 m	98,2 dB
SPL Pmax / 1 m	106 dB
Radiation angle 1.000 Hz (-10 dB)	180°
Transformer	100 V, 6/3/1,5/(0,75) Watt
Dimensions	253 x 193 x 83 mm
Weight	1,7 kg
Material	MDF- wood housing
Connection	3-pole ceramic clamp
Protection	IP54
Colour	White

Part number	Description
116-BBR-WAL 165/6 PP	WALL SPEAK 6W WAL 165/6 EN54



AUTRONICA FIRE AND SECURITY AS Head office, Trondheim, NO-7483 Norway Tel: +47 73 58 25 00, fax: +47 73 58 25 01, e-mail: info@autronicafire.no Oil and Gas division, Stavanger, Norway Tel: +47 51 84 09 00, fax: +47 51 84 09 99 Maritime division, Spikkestad, Norway Tel: +47 31 29 55 00, fax: +47 31 29 55 01