MULTISENSOR WITH SELFVERIFY – BH-220

Interactive fire detection systems Product Datasheet

Features

- Interactive
- Ensures fast response to various fire developments
- Smoke detector for detection of combustion gases mainly consisting of visible (large) particles. Heat sensor assisting for early detection of flaming fires.
- With DYFI+ adaptive and self learning function
- Built-in thermistor for reading of temperature at the detector point
- Short circuit isolator in each detector
- Comprises a built-in alarm indicator (LED)
- Automatic addressing
- Proven technology
- EN 54-5/EN 54-7/EN 54-17
- Designed to meet the requirement of the major maritime classification societies

Applications

BH-220 is a multisensor based on an optical point smoke detector combined with a temperature sensor. A rise in temperature will change the detection platform by increasing the smoke sensitivity in order to improve the detection of combustion gases from flaming fires producing barely a minimum of visible smoke particles.

The multisensor principle combined with advanced signal processing in the detector ensures an early response to any type of fire development.

BH-220 is designed for use with Autronica's interactive fire detection systems. The DYFI+ intelligence combined with the allround smoke sensitivity of BH-220 makes this detector suitable for any application where there is a potential flaming or/and smouldering fire hazard.

Principle

Dual - 2 - sensor detector. Photoelectric, operating on the light scatter principle and temperature measurement by means of a thermistor.



Versions


Multisensor without SelfVerify
Multisensor with SelfVerify
Multisensor with SelfVerify,
environmentally protected.
Multisensor with SelfVerify,
EExia-version for use in all zones.
Multisensor with SelfVerify,
EExn-version for use in zone 2 only.

^{*}See separate data sheet.

Technical specifications		
Weight	165 g	
Material	PC/ABS	
Colour	White	
Sensitivity	Ref. table 1 and 2	
Voltage	10 – 27 VDC	
Current consumption Stand by: External alarm indicator:	< 0,3mA 6mA	
CPD certificate	1134-CPD-017	
Degree of protection	IP44D	
Working temperature	- 20 - + 70°C	
Humidity (non condensing)	Max. 95% RH	
Maintenance	None	
Service	Replace if faulty	
Approvals	See web site	



Dimensions/Connections

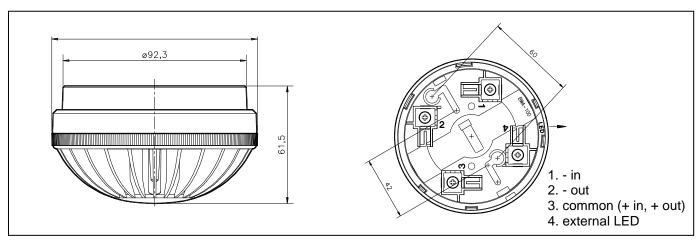

Use of LED output

When LED or other equipment is connected to the LED output, a varistor - Siemens SIOVS07K25 (39V) -Autronica part. no. 116-8464-003.5039, is required between terminals 1 and 4 in base. The LED is connected between terminals 3 and 4, terminal 3 being the positive terminal.

Table 1 - Performance classes

Performance class	Typical application
Clean	Computer rooms
Normal	Offices
Normal 2	Restaurants
Industry	Workshops

Table 2 - Operation classes

Operation class	Alarm type
Multisensor w/heat	Smoke alarm or heat alarm
Multisensor	Smoke alarm (heat assisted)
Heat only	Heat alarm (class A1)

Part number	Description
116-BWA-100	Detector base
116-BHH-220	Detector head
116-BWP-100/20	Optional conduit box for M20 glands
116-BWP-100/25	Optional conduit box for M25 glands
116-BBR-52	Optional audible indicator – SmartBuzzer